

Technical Data sheet



Reference: 7000

Product Name: Blank Module

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | (N.A) |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|-------------|
| Self extinguishing (°C) | 650 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-------|
| Type of Terminals | (N.A) |
| Stripping Length | (N.A) |
| Screwdriver Required | (N.A) |
| Terminal Capacity | (N.A) |
| Max. Tightening Torque | (N.A) |

Components

| | |
|------|-----|
| Body | ABS |
|------|-----|

Technical Data sheet



Reference: 7000/11

Product Name: Half Blank module

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | 80 |
| Outer Packaging | 800 |
| Dimensions (mm) | 44x11 |
| IP rating | IP20 |
| Product Lifespan | (N.A) |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|-------------|
| Self extinguishing (°C) | 650 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-------|
| Type of Terminals | (N.A) |
| Stripping Length | (N.A) |
| Screwdriver Required | (N.A) |
| Terminal Capacity | (N.A) |
| Max. Tightening Torque | (N.A) |

Components

| | |
|------|-----|
| Body | ABS |
|------|-----|

Technical Data sheet



Reference: 7001(L)

Product Name: 1-way Switch 16A - 250V~, Lightable

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | 16AX |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 20 000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | EN 60669-1:1999 +A1+A2 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-------------------|----------------------|
| Body | Polycarbonate |
| Rocker Switch | ABS |
| Terminals | CuZn33 Brass / Steel |
| Fixed Contacts | CuZn33 Brass |
| Moving Contacts | CuZn33 Brass |
| Bi-metal Contacts | 90% Ag 10% Ni |
| Springs | Hardened Steel |
| Pointe | Polyamide PA66 |

Technical Data sheet



Reference: 7003(L)

Product Name: 2-way Switch 16A - 250V~, Lightable

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | 16AX |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 20 000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | EN 60669-1:1999 +A1+A2 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-------------------|----------------------|
| Body | Polycarbonate |
| Rocker Switch | ABS |
| Terminals | CuZn33 Brass / Steel |
| Fixed Contacts | CuZn33 Brass |
| Moving Contacts | CuZn33 Brass |
| Bi-metal Contacts | 90% Ag 10% Ni |
| Springs | Hardened Steel |
| Pointe | Polyamide PA66 |

Technical Data sheet



Reference: 7005(L)

Product Name: Push button 16A - 250V~, Lightable

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | 16A |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 20 000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | EN 60669-1:1999 +A1+A2 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-------------------|----------------------|
| Body | Polycarbonate |
| Push button | ABS |
| Terminals | CuZn33 Brass / Steel |
| Fixed Contacts | CuZn33 Brass |
| Moving Contacts | CuZn33 Brass |
| Bi-metal Contacts | 90% Ag 10% Ni |
| Springs | Hardened Steel |
| Pointe | Polyamide PA66 |

Technical Data sheet



Reference: 7012

Product Name: Reversing Switch 16A - 250V~

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | 16AX |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44X22 |
| IP rating | IP20 |
| Product Lifespan | 20 000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | EN 60669-1:1999 +A1+A2 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-------------------|----------------------|
| Body | Polycarbonate |
| Rocker Switch | ABS |
| Terminals | CuZn33 Brass / Steel |
| Fixed Contacts | CuZn33 Brass |
| Moving Contacts | CuZn33 Brass |
| Bi-metal Contacts | 90% Ag 10% Ni |
| Springs | Hardened Steel |

Technical Data sheet



Reference: 7011

Product Name: 2P 1-way switch 16A - 250V~

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | 16AX |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 20 000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | EN 60669-1:1999 +A1+A2 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-------------------|----------------------|
| Body | Polycarbonate |
| Rocker Switch | ABS |
| Terminals | CuZn33 Brass / Steel |
| Fixed Contacts | CuZn33 Brass |
| Moving Contacts | CuZn33 Brass |
| Bi-metal Contacts | 90% Ag 10% Ni |
| Springs | Hardened Steel |

Technical Data sheet



Reference: 7006

Product Name: Pull switch 16A - 250V~

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | 16A |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44X22 |
| IP rating | IP20 |
| Product Lifespan | 20 000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | EN 60669-1:1999 +A1+A2 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-----------------|----------------------|
| Front Cover | Polycarbonate |
| Body | Polycarbonate |
| Terminals | CuZn33 Brass / Steel |
| Fixed Contacts | CuZn33 Brass |
| Moving Contacts | Beryllium-Copper |
| String | White Linen |

Technical Data sheet



Reference: 7022

Product Name: 2P Socket French Standard

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | 16A |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 5000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|-------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | NF C 61-314/NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-------------|----------------------|
| Front Cover | Polycarbonate |
| Body | Polycarbonate |
| Terminals | CuZn33 Brass / Steel |
| Contacts | CuZn33 Brass |
| Springs | Hardened Steel |

Technical Data sheet



Reference: 7430

Product Name: 2P+E Socket French Standard 16A

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | 16A |
| Inner Packaging | 10 |
| Outer Packaging | 100 |
| Dimensions (mm) | 44x44 |
| IP rating | IP20 |
| Product Lifespan | 5000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|-------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | NF C 61-314/NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-------------|----------------------|
| Front Cover | Polycarbonate |
| Body | Polycarbonate |
| Terminals | CuZn33 Brass / Steel |
| Contacts | CuZn33 Brass |
| Shutters | Polyamide PA6 30% FV |
| Springs | Hardened Steel |

Technical Data sheet



Reference: 7440

Product Name: 2P+E Socket French Standard 20A

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | 20A |
| Inner Packaging | 10 |
| Outer Packaging | 100 |
| Dimensions (mm) | 44x44 |
| IP rating | IP20 |
| Product Lifespan | 5000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|-------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | NF C 61-314/NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-------------|----------------------|
| Front Cover | Polycarbonate |
| Body | Polycarbonate |
| Terminals | CuZn33 Brass / Steel |
| Contacts | Silver-Plated Brass |
| Shutters | Polyamide PA6 30% FV |
| Springs | Hardened Steel |

Technical Data sheet



Reference: 7024

Product Name: Universal 2P Socket Ø4mm

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | 10A |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 5000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|----------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | IEC 60884-1/BS1363-1 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-------------|----------------------|
| Front Cover | Polycarbonate |
| Body | Polycarbonate |
| Terminals | CuZn33 Brass / Steel |
| Contacts | CuZn33 Brass |
| Springs | Hardened Steel |

Technical Data sheet



Reference: 7025

Product Name: Universal 2P Socket Ø4.8mm

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | 16A |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 5000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|----------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | IEC 60884-1/BS1363-1 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-------------|----------------------|
| Front Cover | Polycarbonate |
| Body | Polycarbonate |
| Terminals | CuZn33 Brass / Steel |
| Contacts | CuZn33 Brass |
| Springs | Hardened Steel |

Technical Data sheet



Reference: 7113

Product Name: 2P+E Socket Italian Standard

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | 16A |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 5000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|----------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | IEC 60884-1/BS1363-1 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-------------|----------------------|
| Front Cover | Polycarbonate |
| Body | Polycarbonate |
| Terminals | CuZn33 Brass / Steel |
| Contacts | CuZn33 Brass |
| Shutters | Polyamide PA6 30% FV |
| Springs | Hardened Steel |

Technical Data sheet



Reference: 7330

Product Name: 2P+E Schuko Socket German Standard

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | 16A |
| Inner Packaging | 10 |
| Outer Packaging | 100 |
| Dimensions (mm) | 44x44 |
| IP rating | IP20 |
| Product Lifespan | 5000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|----------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | IEC 60884-1/BS1363-1 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-------------|----------------------|
| Front Cover | Polycarbonate |
| Body | Polycarbonate |
| Terminals | CuZn33 Brass / Steel |
| Contacts | CuZn33 Brass |
| Shutters | Polyamide PA6 30% FV |
| Springs | Hardened Steel |

Technical Data sheet



Reference: 7335

Product Name: Universal 2P+E Socket

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | 13A |
| Inner Packaging | 10 |
| Outer Packaging | 100 |
| Dimensions (mm) | 44x44 |
| IP rating | IP20 |
| Product Lifespan | 5000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|----------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | IEC 60884-1/BS1363-1 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-------------|----------------------|
| Front Cover | Polycarbonate |
| Body | Polycarbonate |
| Terminals | CuZn33 Brass / Steel |
| Contacts | CuZn33 Brass |
| Shutters | Polyamide PA6 30% FV |
| Springs | Hardened Steel |

Technical Data sheet



Reference: 7027

Product Name: Shutters control with 3 positions

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | 16AX |
| Inner Packaging | 10 |
| Outer Packaging | 100 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 20 000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | EN 60669-1:1999 +A1+A2 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-------------------|----------------------|
| Body | Polycarbonate |
| Rocker Switch | ABS |
| Terminals | CuZn33 Brass / Steel |
| Fixed Contacts | CuZn33 Brass |
| Moving Contacts | CuZn33 Brass |
| Bi-metal Contacts | 90% Ag 10% Ni |
| Springs | Hardened Steel |

Technical Data sheet



Reference: 7037

Product Name: Shutters control with up/down push buttons

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | 16A |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 20 000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | EN 60669-1:1999 +A1+A2 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-------------------|----------------|
| Front Cover | Polycarbonate |
| Body | Polycarbonate |
| Push Button | polycarbonate |
| Terminals | CuZn33 Brass |
| Moving Contacts | CuZn33 Brass |
| Bi-metal Contacts | 90% Ag 10% Ni |
| Springs | Hardened Steel |

Technical Data sheet



Reference: 7048

Product Name: Buzzer

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 12V Or 250V~ |
| Rated Current | (N.A) |
| Inner Packaging | 10 |
| Outer Packaging | 100 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 10h |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | NF C 61730/NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 5 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-------------|-------------------|
| Front Cover | ABS |
| Body | ABS |
| Coil | Enamelled Copper |
| Terminals | Laiton |
| Screws | Zinc-Plated Steel |

Technical Data sheet



Reference: 7080

Product Name: Motion Detector

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | 16A |
| Inner Packaging | 10 |
| Outer Packaging | 100 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 20 000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | EN 60669-1:1999 +A1+A2 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 5 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 1x1,5mm ² |
| Max. Tightening Torque | 40Ncm |

Components

| | |
|----------------|--------------------|
| Body | Polycarbonate |
| Front Cover | Polycarbonate |
| Lens | Polycarbonate |
| Potentiometers | Polycarbonate |
| Terminals | CuZn40 Brass |
| Screws | Zinc-Plated Steel |
| Module | 8m/120°- 10s-10min |

Technical Data sheet



Reference: 7095

Product Name: USB charger with 1 socket, Output Current : 1A

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ / 5V |
| Rated Current | 16A |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 5 000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|-------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 5 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 1x1,5mm ² |
| Max. Tightening Torque | 40Ncm |

Components

| | |
|-----------------|----------------------|
| USB Connector | (N.A) |
| Body | Polycarbonate |
| Front Cover | ABS |
| Terminal Screws | Zinc-Plated Steel |
| Terminals | Nickel-Plated Copper |

Technical Data sheet



Reference: 7096

Product Name: USB charger with 2 sockets Output Current : 2.1A

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ / 5V |
| Rated Current | 16A |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 5 000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|-------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 5 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 1x1,5mm ² |
| Max. Tightening Torque | 40Ncm |

Components

| | |
|-----------------|----------------------|
| USB Connector | (N.A) |
| Body | Polycarbonate |
| Front Cover | ABS |
| Terminal Screws | Zinc-Plated Steel |
| Terminals | Nickel-Plated Copper |

Technical Data sheet



Reference: 7093

Product Name: Spring connectors for speakers

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | (N.A) |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|-------------|
| Self extinguishing (°C) | 650 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Automatic terminals |
| Stripping Length | 5 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 1x1,5mm ² |
| Max. Tightening Torque | 40Ncm |

Components

| | |
|-----------|-----|
| Body | ABS |
| Connector | ABS |

Technical Data sheet



Reference: 7094

Product Name: HDMI Socket

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | (N.A) |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|---------------|
| Self extinguishing (°C) | 650 |
| UV Resistant | Yes |
| Standard Compliance | Standard HDMI |
| RoHs | Compliant |

Installation

| | |
|------------------------|-------|
| Type of Terminals | (N.A) |
| Stripping Length | (N.A) |
| Screwdriver Required | (N.A) |
| Terminal Capacity | (N.A) |
| Max. Tightening Torque | (N.A) |

Components

| | |
|------------------|-----|
| Body | ABS |
| Type A Connector | ABS |

Technical Data sheet



Reference: 7122

Product Name: TV aerial socket Ø 9.52mm

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 500 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|---------------------|
| Self extinguishing (°C) | 650 |
| UV Resistant | Yes |
| Standard Compliance | CEI 169/NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 5 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 1x1,5mm ² |
| Max. Tightening Torque | 40Ncm |

Components

| | |
|-----------------|-------------------|
| Front Cover | ABS |
| Body | ABS |
| Female Terminal | CuZn40 Brass |
| Earth Terminal | CuZn40 Brass |
| Terminals | Zinc-Plated Steel |

Technical Data sheet



Reference: 7300

Product Name: Satellite F type Coaxial Socket

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | (N.A) |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|----------------------------|
| Self extinguishing (°C) | 650 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60169-24/NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|----------------------|
| Type of Terminals | (N.A) |
| Stripping Length | (N.A) |
| Screwdriver Required | (N.A) |
| Terminal Capacity | 1x1,5mm ² |
| Max. Tightening Torque | 40Ncm |

Components

| | |
|-----------------|----------------------|
| Front Cover | ABS |
| Female Terminal | Nickel-Plated Copper |
| Male Terminal | Nickel-Plated Copper |

Technical Data sheet



Reference: 7336

Product Name: demixed TV/SAT Coaxial Socket

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | 10 |
| Outer Packaging | 100 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 500 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|---------------------|
| Self extinguishing (°C) | 650 |
| UV Resistant | Yes |
| Standard Compliance | CEI 169/NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 5 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 1x1,5mm ² |
| Max. Tightening Torque | 40Ncm |

Components

| | |
|---------------|----------------------|
| Front Cover | ABS |
| Module TV-SAT | Nickel-Plated Copper |

Technical Data sheet



Reference: 7361

Product Name: Electronic Light Dimmer 40-900W

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V |
| Rated Current | 3,6A |
| Inner Packaging | 10 |
| Outer Packaging | 100 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 20 000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|--------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | EN 60669-2-1 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 5 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 1x1,5mm ² |
| Max. Tightening Torque | 40Ncm |

Components

| | |
|---------------|------------------|
| Body | Polycarbonate |
| Support Frame | Polycarbonate |
| Bouton | Polycarbonate |
| Terminals | CuZn40 Brass |
| Circuit Board | Standard 40/900W |

Technical Data sheet



Reference: 7413

Product Name: Flush-Mounted Waterproof Support Frame, 1 & 2-modules

General Characteristics

| | |
|-------------------|-----------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | 16 |
| Outer Packaging | 160 |
| Dimensions (mm) | (N.A) |
| IP rating | IP55 |
| Product Lifespan | (N.A) |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Screw Terminals |

Environmental Characteristics

| | |
|-------------------------|-------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60529/NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | (N.A) |
| Stripping Length | (N.A) |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | (N.A) |
| Max. Tightening Torque | 80Ncm |

Components

| | |
|-----------------|-------------------|
| Lid | Polycarbonate |
| Support Frames | Polycarbonate |
| Sealing Joint | White PVC |
| Transparent Lid | Transparent PVC |
| Screws | Zinc-Plated Steel |

Technical Data sheet



Reference: 7448

Product Name: Badge switch with 50s Delay

General Characteristics

| | |
|-------------------|-----------------|
| Rated Voltage | 250V~ |
| Rated Current | 16A |
| Inner Packaging | 4 |
| Outer Packaging | 36 |
| Dimensions (mm) | (N.A) |
| IP rating | IP20 |
| Product Lifespan | 20 000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Screw Terminals |

Environmental Characteristics

| | |
|-------------------------|------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | EN 60669-1:1999 +A1+A2 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 80Ncm |

Components

| | |
|---------------|-------------------|
| Body | Polycarbonate |
| Cover Plate | ABS |
| Chassis | Hardened Steel |
| Terminals | CuZn40 Brass |
| Screws | Zinc-Plated Steel |
| Circuit Board | Standards |

Technical Data sheet



Reference: 7625

Product Name: LED emergency lighting 250V~

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | 250V~ |
| Rated Current | (N.A) |
| Inner Packaging | 10 |
| Outer Packaging | 100 |
| Dimensions (mm) | 44x44 |
| IP rating | IP20 |
| Product Lifespan | (N.A) |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|-------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 5 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 1x1,5mm ² |
| Max. Tightening Torque | 40Ncm |

Components

| | |
|----------------|-------------------|
| Battery | 4H80BC-4,8V 80mAh |
| Circuit Board | Standards |
| Front Cover | Polycarbonate |
| Body | ABS |
| Sliding Switch | Polycarbonate |
| LED Lamp | 82Lm |

Technical Data sheet



Reference: 7960

Product Name: RJ45 data port Cat.6 UTP

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | 10 |
| Outer Packaging | 100 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 750 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|-------------------|
| Self extinguishing (°C) | 650 |
| UV Resistant | Yes |
| Standard Compliance | RJ-45/NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|---------------------|
| Type of Terminals | Automatic terminals |
| Stripping Length | (N.A) |
| Screwdriver Required | (N.A) |
| Terminal Capacity | (N.A) |
| Max. Tightening Torque | (N.A) |

Components

| | |
|---------------|----------------------|
| Front Cover | ABS |
| Sliding Cover | ABS |
| RJ45 Module | Cat.6 UTP |
| Contacts | Nickel-Plated Bronze |
| Terminals | Nickel-Plated Bronze |

Technical Data sheet



Reference: 7960F

Product Name: Shielded RJ45 data port Cat.6 FTP

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | 10 |
| Outer Packaging | 100 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 750 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|-------------------|
| Self extinguishing (°C) | 650 |
| UV Resistant | Yes |
| Standard Compliance | RJ-45/NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|---------------------|
| Type of Terminals | Automatic terminals |
| Stripping Length | (N.A) |
| Screwdriver Required | (N.A) |
| Terminal Capacity | (N.A) |
| Max. Tightening Torque | (N.A) |

Components

| | |
|---------------|----------------------|
| Front Cover | ABS |
| Sliding Cover | ABS |
| RJ45 Module | Cat.6 FTP |
| Contacts | Nickel-Plated Bronze |
| Terminals | Nickel-Plated Bronze |

Technical Data sheet



Reference: 7984

Product Name: RJ11 Phone Socket with 4 Contacts

General Characteristics

| | |
|-------------------|---------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | 20 |
| Outer Packaging | 200 |
| Dimensions (mm) | 44x22 |
| IP rating | IP20 |
| Product Lifespan | 750 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Clipping |

Environmental Characteristics

| | |
|-------------------------|-------------------|
| Self extinguishing (°C) | 650 |
| UV Resistant | Yes |
| Standard Compliance | RJ-11/NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 5 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 1x1,5mm ² |
| Max. Tightening Torque | 40Ncm |

Components

| | |
|-----------|----------------------|
| Body | ABS |
| Module | ABS |
| Contacts | Nickel-Plated Bronze |
| Terminals | Nickel-Plated Brass |
| Screws | Zinc-Plated Steel |

Technical Data sheet



Reference: 7536

Product Name: Flush-Mounted Waterproof 2P+E Socket

General Characteristics

| | |
|-------------------|-----------------|
| Rated Voltage | 250V~ |
| Rated Current | 16A |
| Inner Packaging | 12 |
| Outer Packaging | 120 |
| Dimensions (mm) | 44x44 |
| IP rating | IP44 |
| Product Lifespan | 5 000 cycles |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Screw Terminals |

Environmental Characteristics

| | |
|-------------------------|-------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | NF C 61-314/NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | Screw Terminals |
| Stripping Length | 11 mm |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | 2x2,5mm ² |
| Max. Tightening Torque | 200Ncm |

Components

| | |
|-----------------|----------------------|
| Lid | Polycarbonate |
| Support Frame | Polycarbonate |
| Sealing Joint | White PVC |
| Terminal Screws | Zinc-Plated Steel |
| Body | Polycarbonate |
| Contacts | CuZn33 Brass |
| Terminals | CuZn33 Brass |
| Shutters | Polyamide PA6 30% FV |

Technical Data sheet



Reference: 7519

Product Name: Flush-Mounted Waterproof Support Frame, 3-modules

General Characteristics

| | |
|-------------------|-----------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | 12 |
| Outer Packaging | 120 |
| Dimensions (mm) | (N.A) |
| IP rating | IP55 |
| Product Lifespan | (N.A) |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Screw Terminals |

Environmental Characteristics

| | |
|-------------------------|-------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60529/NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | (N.A) |
| Stripping Length | (N.A) |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | (N.A) |
| Max. Tightening Torque | 80Ncm |

Components

| | |
|-----------------|-------------------|
| Lid | Polycarbonate |
| Support Frame | Polycarbonate |
| Sealing Joint | White PVC |
| Transparent Lid | Transparent PVC |
| Screws | Zinc-Plated Steel |

Technical Data sheet



Reference: 7520

Product Name: Flush-Mounted Waterproof Support Frame, 4-modules

General Characteristics

| | |
|-------------------|-----------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | 8 |
| Outer Packaging | 80 |
| Dimensions (mm) | (N.A) |
| IP rating | IP55 |
| Product Lifespan | (N.A) |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Screw Terminals |

Environmental Characteristics

| | |
|-------------------------|-------------------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60529/NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | (N.A) |
| Stripping Length | (N.A) |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | (N.A) |
| Max. Tightening Torque | 80Ncm |

Components

| | |
|-----------------|-------------------|
| Lid | Polycarbonate |
| Support Frame | Polycarbonate |
| Sealing Joint | White PVC |
| Transparent Lid | Transparent PVC |
| Screws | Zinc-Plated Steel |

Technical Data sheet



Reference: 7524

Product Name: Surface mounted 1-module Support Frame

General Characteristics

| | |
|-------------------|-----------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | (N.A) |
| Outer Packaging | 54 |
| Dimensions (mm) | (N.A) |
| IP rating | IP20 |
| Product Lifespan | (N.A) |
| Mounting Method | Surface-Mounted |
| Type of Fastening | Screw Terminals |

Environmental Characteristics

| | |
|-------------------------|-------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | (N.A) |
| Stripping Length | (N.A) |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | (N.A) |
| Max. Tightening Torque | 80Ncm |

Components

| | |
|----------------|-------------------|
| Mounting Box | ABS |
| Support Frame | Polycarbonate |
| Membrane Gland | White PVC |
| Fixing Screws | Zinc-Plated Steel |
| Shutter | ABS |

Technical Data sheet



Reference: 7525

Product Name: Surface mounted 2-modules Support Frame

General Characteristics

| | |
|-------------------|-----------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | (N.A) |
| Outer Packaging | 54 |
| Dimensions (mm) | (N.A) |
| IP rating | IP20 |
| Product Lifespan | (N.A) |
| Mounting Method | Surface-Mounted |
| Type of Fastening | Screw Terminals |

Environmental Characteristics

| | |
|-------------------------|-------------|
| Self extinguishing (°C) | 650/850 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | (N.A) |
| Stripping Length | (N.A) |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | (N.A) |
| Max. Tightening Torque | 80Ncm |

Components

| | |
|----------------|-------------------|
| Mounting Box | ABS |
| Support Frame | Polycarbonate |
| Membrane Gland | White PVC |
| Fixing Screws | Zinc-Plated Steel |

Technical Data sheet



Reference: 7535

Product Name: Surface mounted 3-modules Support Frame

General Characteristics

| | |
|-------------------|-----------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | (N.A) |
| Outer Packaging | 36 |
| Dimensions (mm) | (N.A) |
| IP rating | IP20 |
| Product Lifespan | (N.A) |
| Mounting Method | Surface-Mounted |
| Type of Fastening | Screw Terminals |

Environmental Characteristics

| | |
|-------------------------|-------------|
| Self extinguishing (°C) | 650/850 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | (N.A) |
| Stripping Length | (N.A) |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | (N.A) |
| Max. Tightening Torque | 80Ncm |

Components

| | |
|----------------|-------------------|
| Mounting Box | ABS |
| Support Frame | Polycarbonate |
| Membrane Gland | White PVC |
| Fixing Screws | Zinc-Plated Steel |

Technical Data sheet



Reference: 7545

Product Name: Surface mounted 4-modules Support Frame

General Characteristics

| | |
|-------------------|-----------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | (N.A) |
| Outer Packaging | 40 |
| Dimensions (mm) | (N.A) |
| IP rating | IP20 |
| Product Lifespan | (N.A) |
| Mounting Method | Surface-Mounted |
| Type of Fastening | Screw Terminals |

Environmental Characteristics

| | |
|-------------------------|-------------|
| Self extinguishing (°C) | 650/850 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | (N.A) |
| Stripping Length | (N.A) |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | (N.A) |
| Max. Tightening Torque | 80Ncm |

Components

| | |
|----------------|-------------------|
| Mounting Box | ABS |
| Support Frame | Polycarbonate |
| Membrane Gland | White PVC |
| Fixing Screws | Zinc-Plated Steel |

Technical Data sheet



Reference: 7565

Product Name: Surface mounted 6-modules Support Frame

General Characteristics

| | |
|-------------------|-----------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | (N.A) |
| Outer Packaging | 40 |
| Dimensions (mm) | (N.A) |
| IP rating | IP20 |
| Product Lifespan | (N.A) |
| Mounting Method | Surface-Mounted |
| Type of Fastening | Screw Terminals |

Environmental Characteristics

| | |
|-------------------------|-------------|
| Self extinguishing (°C) | 650/850 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | (N.A) |
| Stripping Length | (N.A) |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | (N.A) |
| Max. Tightening Torque | 80Ncm |

Components

| | |
|----------------|-------------------|
| Mounting Box | ABS |
| Support Frame | Polycarbonate |
| Membrane Gland | White PVC |
| Fixing Screws | Zinc-Plated Steel |

Technical Data sheet



Reference: 702/R

Product Name: 2-module Square Mounting Frame

General Characteristics

| | |
|-------------------|-----------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | (N.A) |
| Outer Packaging | 220 |
| Dimensions (mm) | (N.A) |
| IP rating | (N.A) |
| Product Lifespan | (N.A) |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Screw Terminals |

Environmental Characteristics

| | |
|-------------------------|-------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60695 |
| RoHs | Compliant |


Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | (N.A) |
| Stripping Length | (N.A) |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | (N.A) |
| Max. Tightening Torque | 80Ncm |

Components

| | |
|---------------|-------------------|
| Body | Polycarbonate |
| Fixing Screws | Zinc-Plated Steel |

Technical Data sheet

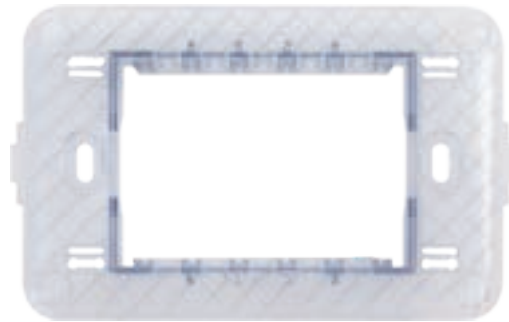

Reference: 703/R

Product Name: 3-modules Rectangular Mounting Frame

General Characteristics

| | |
|-------------------|-----------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | (N.A) |
| Outer Packaging | 200 |
| Dimensions (mm) | (N.A) |
| IP rating | (N.A) |
| Product Lifespan | (N.A) |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Screw Terminals |

Environmental Characteristics

| | |
|-------------------------|-------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60695 |
| RoHs | Compliant |


Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | (N.A) |
| Stripping Length | (N.A) |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | (N.A) |
| Max. Tightening Torque | 80Ncm |

Components

| | |
|---------------|-------------------|
| Body | Polycarbonate |
| Fixing Screws | Zinc-Plated Steel |

Technical Data sheet

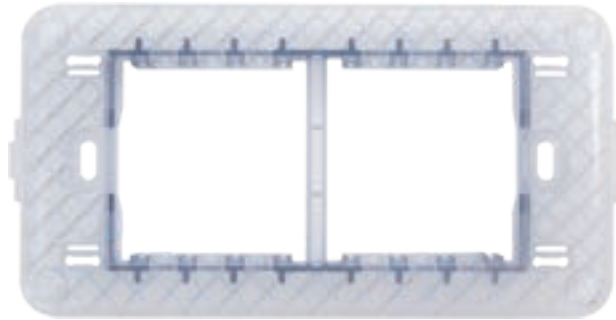

Reference: 704/R

Product Name: 4-modules Rectangular Mounting Frame

General Characteristics

| | |
|-------------------|-----------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | (N.A) |
| Outer Packaging | 100 |
| Dimensions (mm) | (N.A) |
| IP rating | (N.A) |
| Product Lifespan | (N.A) |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Screw Terminals |

Environmental Characteristics

| | |
|-------------------------|-------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60695 |
| RoHs | Compliant |


Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | (N.A) |
| Stripping Length | (N.A) |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | (N.A) |
| Max. Tightening Torque | 80Ncm |

Components

| | |
|---------------|-------------------|
| Body | Polycarbonate |
| Fixing Screws | Zinc-Plated Steel |

Technical Data sheet

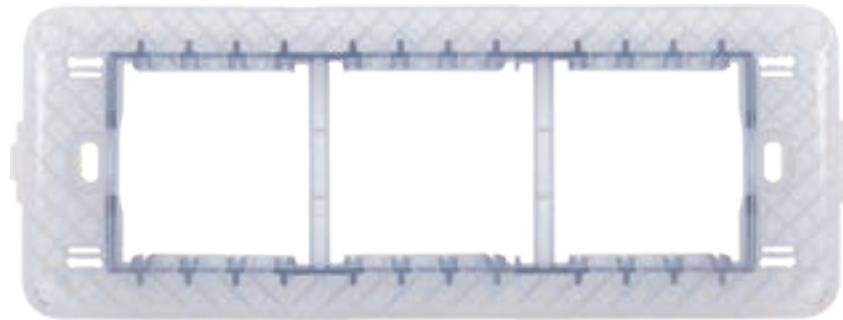

Reference: 706/R

Product Name: 6-modules Rectangular Mounting Frame

General Characteristics

| | |
|-------------------|-----------------|
| Rated Voltage | (N.A) |
| Rated Current | (N.A) |
| Inner Packaging | (N.A) |
| Outer Packaging | 50 |
| Dimensions (mm) | (N.A) |
| IP rating | (N.A) |
| Product Lifespan | (N.A) |
| Mounting Method | Flush-Mounted |
| Type of Fastening | Screw Terminals |

Environmental Characteristics

| | |
|-------------------------|-------------|
| Self extinguishing (°C) | 850 |
| UV Resistant | Yes |
| Standard Compliance | NF EN 60695 |
| RoHs | Compliant |

Installation

| | |
|------------------------|-----------------------|
| Type of Terminals | (N.A) |
| Stripping Length | (N.A) |
| Screwdriver Required | Phillips / Flat-blade |
| Terminal Capacity | (N.A) |
| Max. Tightening Torque | 80Ncm |

Components

| | |
|---------------|-------------------|
| Body | Polycarbonate |
| Fixing Screws | Zinc-Plated Steel |